

DELTA[®] protects property. Saves energy. Creates comfort.



DELTA[®]-FOXX

PREMIUM QUALITY

The Most Advanced Breathable Roof Underlayment on the Market.

- Ideal for lifetime concrete, clay, or slate tile roofs.
- Waterproof.
- Highly vapor permeable - >500 perms.
- Anti-slip coating.
- Highly scuff, tear and UV-resistant.



■ Premium Sheathing Membrane

■ For ventilated or fully insulated pitched roofs

■ For new construction and re-roofing

**Looking for the perfect solution for your roof?
With the DELTA® System, you're always onto a sure thing!**



**■ Outside:
DELTA®-FOXX**

Put an end to harmful moisture under the roof. Protect thermal insulation from penetration by moisture vapors, dirt, dust, rain and driven snow. Keep insulation dry and always working properly.

**■ Inside:
DELTA®-REFLEX**

Air and vapor barrier. Up to 10% better thermal insulation. 100% air and vapor exclusion. Up to 50% radiant heat reflection.


**■ DELTA®-FOXX
Rainproof roof lining**

On roofs with below standard pitch, DELTA®-FOXX, used in combination with other components of the DELTA®System, ensures that your roof is watertight and that all the seams, joints and overlaps are stuck down or fused in a correct and totally watertight manner.

Premium Roof Underlayment:

DELTA®-FOXX

Robust. Firm Under Foot. Vapor

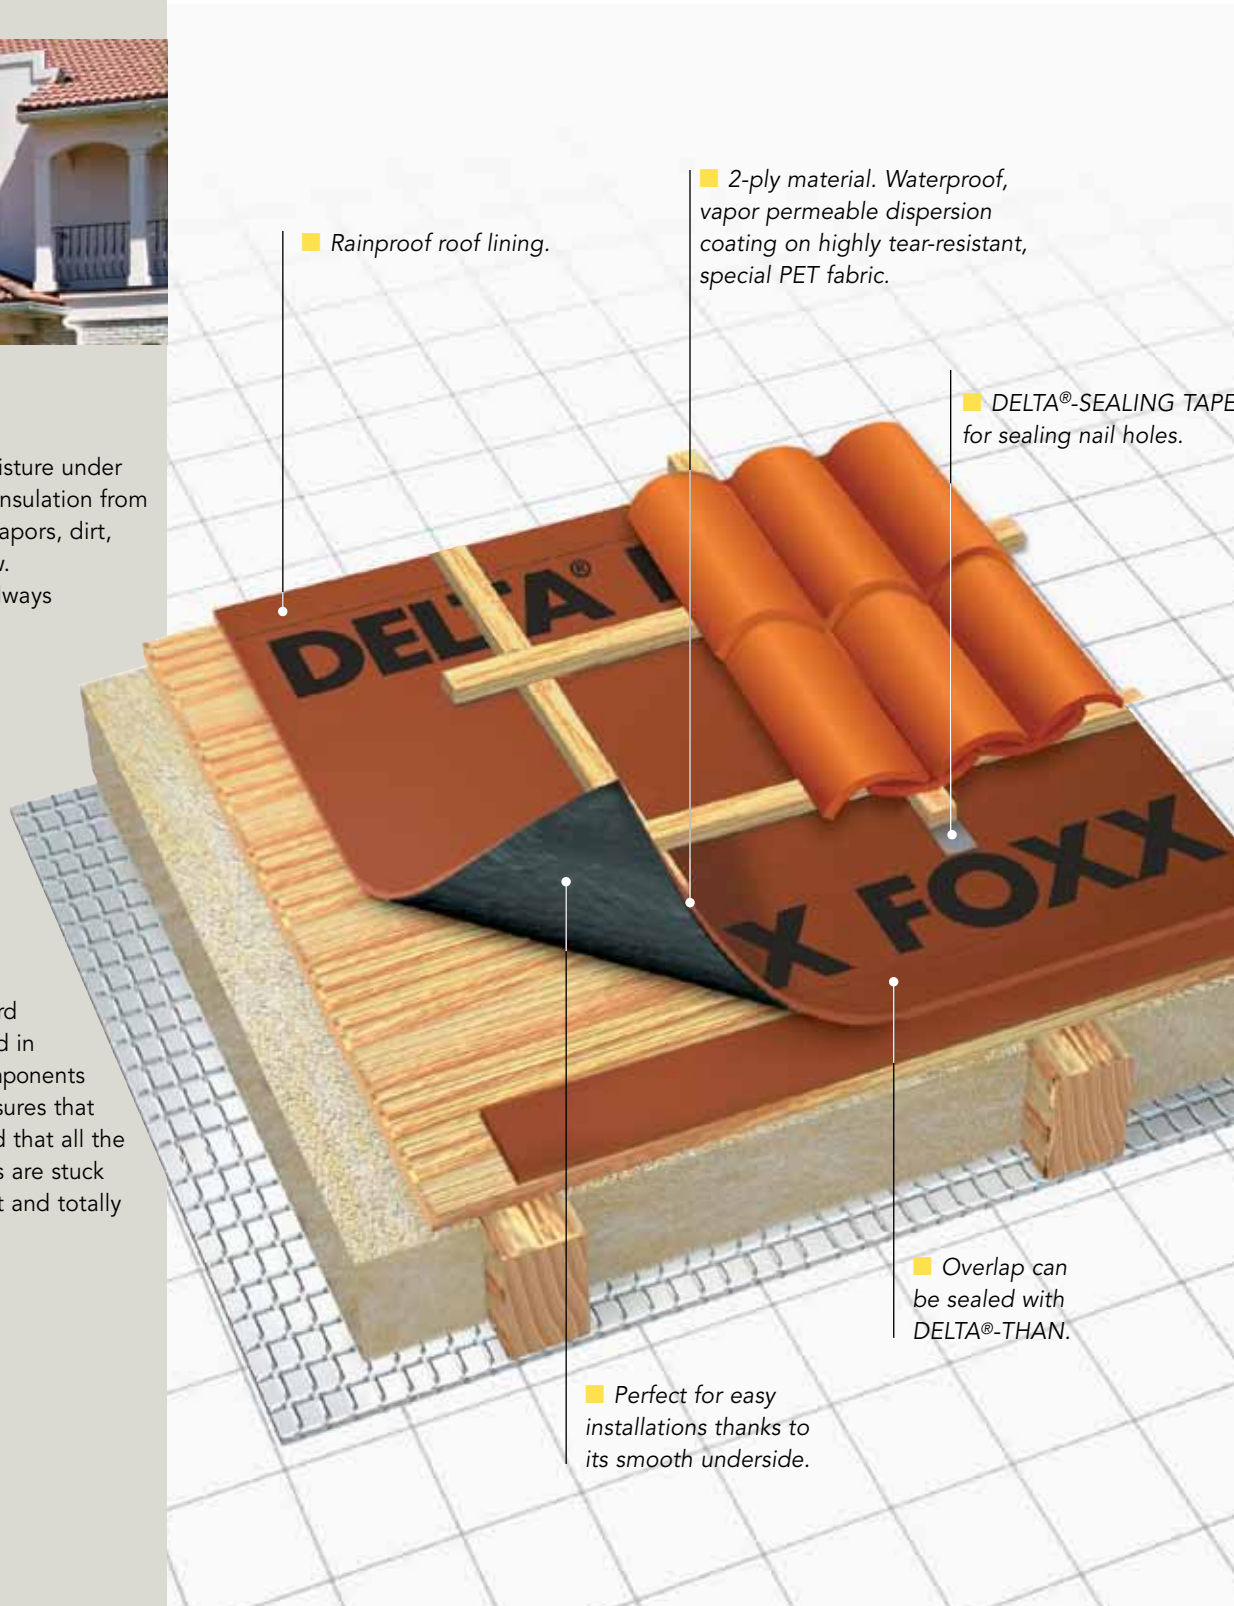

■ Rainproof roof lining.

■ 2-ply material. Waterproof, vapor permeable dispersion coating on highly tear-resistant, special PET fabric.

■ DELTA®-SEALING TAPE for sealing nail holes.

■ Overlap can be sealed with DELTA®-THAN.

■ Perfect for easy installations thanks to its smooth underside.

PREMIUM QUALITY



Windproof when used with DELTA®-THAN.



Suited for use as rainproof roof lining, DELTA®-FOXX is absolutely waterproof.



Easy-to-use with DELTA®System components.

Open. Ideal as a rainproof roof lining.

DELTA®-FOXX ...

- ... ensures that excess moisture is removed from roof structures due to its extremely high vapor permeance of 550 perms.
- ... is permanently and reliably waterproof thanks to its water-repellent dispersion coating.
- ... is extraordinarily tough.
- ... weighs approx. 0.045 lb/ft² (220 g/m²) and is easy to lay perfectly without distorting, buckling or fish mouths.
- ... can be pulled effortlessly over rough-sawn surfaces, thanks to the smooth underside structure – increasing laying speeds and reducing costs.
- ... is firm and safe under foot, plus highly scuff and tear-resistant. Laid on top of solid sheathing, this superior roofing membrane can be walked on with no problem, wet or dry.
- ... cuts out annoying reflections even in extremely sunny conditions, thanks to its special "anti-glare" coating.



Fast and easy installation with DELTA®-FOXX.

Evaluation Report (Certification)
ICC-ESR2625



Take advantage of the full DELTA®System.

Outside ...

... DELTA®-FOXX sheathing membranes for fully insulated or ventilated pitched roofs. Optimum thermal insulation from the start.

Inside ...

... DELTA®-REFLEX air and vapor barrier. An energy-saving sheet made of rugged, highly flexible 4-ply material. Reflects heat and saves on heating costs. Provides protection from electrical smog.



Needless to say, we have a range of perfect accessories, which you can find additional information about on the next page.

DELTA®-FOXX

Technical Data (typical values):

Material	Highly tear-resistant PET fabric with a diffusive, waterproof dispersion coating.
Application	On pitched roofs with rigid sheathing, under any roof cladding.
ASTM E96 (Proc. B)	
Water Vapor Transmission	3763 g/m ² 24h
Permeance	31,467 ng/Pa/s/m
Perms	550 grains/h/ft ² /in Hg
ASTM D5035	
MD: Breaking Load	103 lb/2 in. (461 N/50mm)
MD: Elongation at break	37 %
CD: Breaking Load	62 lb/2 in. (278 N/50mm)
CD: Elongation at break	48 %
ASTM D1682	
Tensile Strength	131.6 lb
ASTM D1922	
MD: Tear resistance	1916 g
CD: Tear resistance	2564 g
ASTM D4533	
MD: Tearing Strength	23 lb (103 N)
CD: Tearing Strength	16 lb (71 N)
ASTM D751	
MD: Tearing Strength	N.M.
CD: Tearing Strength	40.5 N
AATCC Test Method 42-2000	
Water impact resistance	pass
CAN/CGSB-4.2 No 26.3	
Resistance to water penetration	104 cm
ASTM D4869	
Liquid Water Transmission	pass
ASTM D3462-03 section 8.1.11	
Pull-Through Force	211 N
Service temperature range	-40°F to 176°F (-40°C to +80°C)
Roll weight	approx. 35 lb (16 kg)
Roll size	164 ft x 4.92 ft (50 m x 1.5 m) (8 squares)
Due to variable weather and UV condition,s we recommend efficient covering of the roof underlayment.	

DELTA®-Accessories for DELTA®-FOXX.

DELTA® System makes life easier with these accessories.



DELTA®-MULTI-BAND

All-round adhesive tape featuring top adhesion. For all DELTA® sheets for interior and exterior application, particularly for sealing overlaps and openings, and repairing tears.



DELTA®-FLEXX-BAND

Stretchable sealing tape for inner and outer connections to structural details such as skylights, dormer windows, exhaust pipes, cables, etc.



DELTA®-THAN

Permanently elastic sealing compound for fixing and seam jointing of DELTA® sheet products. Can also be used to secure connections.



... for owners:

" ... What I get is a mature problem solution provided at a fair price by the top specialist in quality branded products!"

... for contractors:

" ... What I get is a complete system made by a single manufacturer that enables me to do anything to the owner's entire satisfaction. There is no safer way!"

... for planners:

" ... I can be certain that innovative products will be used in implementing my roof and cellar plans in a systematic and forward-looking way."

DELTA®

COSELLA DÖRKEN
 Cosella-Dörken Products Inc.
 4655 Delta Way
 Beamsville, Ontario
 L0R 1B4
 (905) 563-3255
 Fax: (905) 563-5582
 1-888-4 DELTA 4
 info@cosella-dorken.com
 delta-foxx.com

A company of the Dörken Group

The information printed in this brochure reflects product information and specifications at the date of printing. The manufacturer reserves the right to make changes when necessary.

■ Detailed installation instructions for all DELTA® products may be obtained from **cosella-dorken.com** as PDF files for you to print out and save.

DELTA® stands for quality products that you can trust - manufactured in-house by Dörken.