

DELTA® protects property. Saves energy. Creates comfort.

## DATA SHEET


### DELTA®-FASSADE S

#### Accessories

#### PROPERTIES

DELTA®-FASSADE FLASHING and DELTA®-FASSADE TAPE are designed for use with DELTA®-FASSADE S Water-resistive Barrier with open joint claddings of up to 2" (50 mm) wide which expose up to 40% of the entire facade surface. DELTA®-FASSADE FLASHING and DELTA®-FASSADE TAPE provide air and water tightness at overlaps, fasteners and detail areas. They provide the same high UV light resistance as DELTA®-FASSADE S and contribute to an energy-efficient building enclosure.

Product name	<b>DELTA®-FASSADE TAPE</b>
Color	Black
Roll size	2 1/2" x 65'-7" (60 mm x 20 m)
Packaging	10 per box
Product name	<b>DELTA®-FASSADE FLASHING 4"</b>
Color	Black
Roll size	4" x 65'-7" (100 mm x 20 m)
Packaging	6 per box
Product name	<b>DELTA®-FASSADE FLASHING 9"</b>
Color	Black
Roll size	9" x 65'-7" (230 mm x 20 m)
Packaging	2 per box

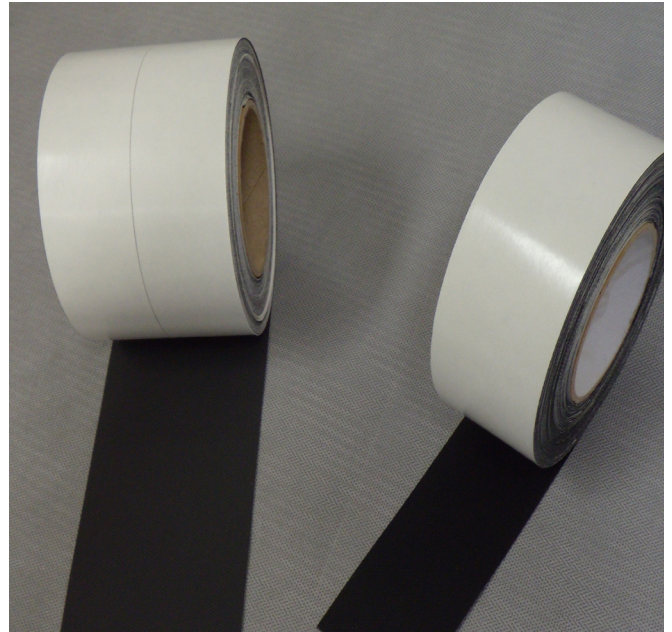

Cosella-Dörken Products Inc. offers a wide variety of accessories to complete a UV resistant WRB System.

- **DELTA®-FAS CORNER** flexible plastic corner for use in new applications creates very reliable air- and water-tight window and door corners (40 pieces per box)
- **DELTA®-FLEXX BAND** stretchable butyl-rubber based adhesive on a special non-woven fabric 4" x 33' (100 mm x 10 m) (3 per box)
- **DELTA®-THAN** permanently elastic, special rubber compound adhesive. Comes in a cartridge 310 ml (12 cartridges per box)

DELTA® products support sustainable and energy-efficient building practices, including efforts toward achieving LEED® certification (LEED® for New Construction & Major Renovations, LEED® for Core and Shell, LEED® for Existing Buildings and LEED® for Homes).

For technical support, call our technical support team at 1-888-4DELTA4 (1-888-433-5824) extension 326, or visit [www.cosella-dorken.com](http://www.cosella-dorken.com).

#### ICC ESR-2932 DELTA® Water-resistive Barriers