

MONOLITH SERIES



PRODUCT SUMMARY

A popular choice for new and retrofit projects, Monolith Series by Morin is value engineered with thermal and structural properties sufficient for many applications.

PRODUCT SPECIFICATION

Thickness: 1-1/8" (29mm)

Widths: 24" and 30" standard
(special widths 8" min. to 36" max.)

Lengths: 1'-0" to 24'-0" standard

Transverse and Longitudinal Bends
- Offered in both horizontal and vertical applications

Exterior Surfaces - Steel: Smooth or non-directional embossed Aluminum: Smooth or non-directional embossed

Standard Metal Gauge: 20/22/24 steel, 0.040" aluminum

Core Material - Expanded polystyrene (polyisocyanurate optional)

R-Value ISO core: 7.1 (side lap inclusive)


EPS core: 4.5 (side lap inclusive)




MS-24H, MS-30H



MS-24V, MS-30V

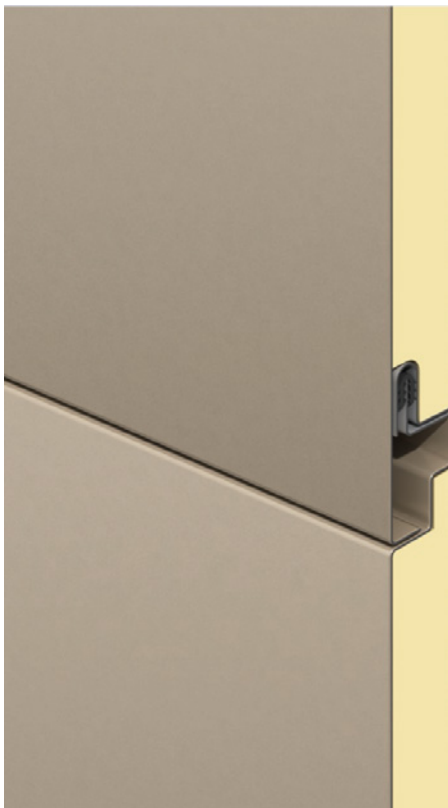

Tight Joint (optional)

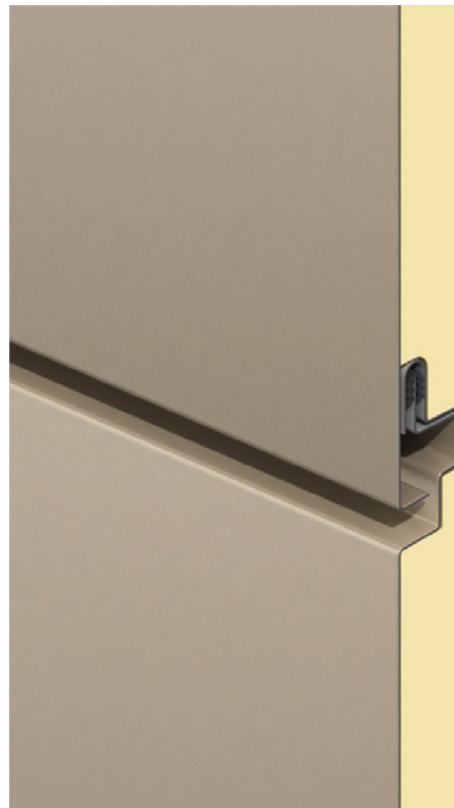

1/2" Reveal Joint (Standard)

Morin

A Kingspan Group Company

HQ / East 685 Middle Street, Bristol, CT 06010, 1-800-640-9501
West 10707 Commerce Way, Fontana, CA 92337, 1-800-700-6140
South 1975 Eidson Drive, Deland, FL 32724, 1-800-640-9501
www.morincorp.com

Locations of Individual Panel Manufacturing:

CT Connecticut **CA** California **FL** Florida